


# Commander 2

Smart EV charging at your fingertips.

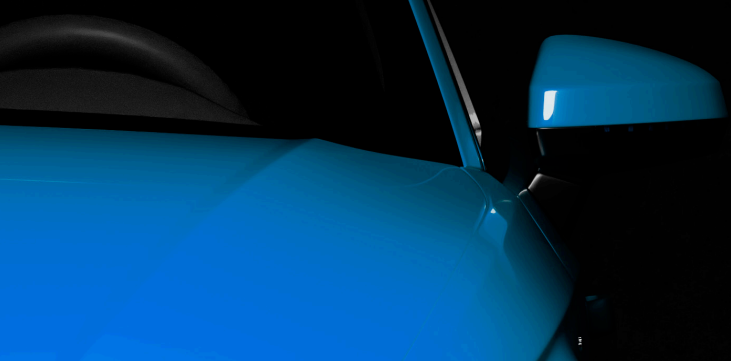

## Compatible

Commander 2 is available with type 1 and type 2 charging cables.



## Durability

Safely install and use your charger indoors or outdoors.



## Two year warranty

Developed and manufactured in Europe, Commander 2 is designed to last.



## Powerful EV charge

Up to 22 kW of charging capacity.



## Easy to use

The built-in touchscreen makes it easy to unlock and choose charge settings.



## Easy to share

Secure shared access with password protection, RFID cards, or the myWallbox app.



## Connected

Connects to any smart device via Wi-Fi, Bluetooth, Ethernet, or 4G (optional).




## Controllable

Use the myWallbox platform to control multiple chargers and users, access our energy management solutions, benefit from our integrated payment system, and more.



## Power Sharing

Connect two or more chargers to the same electrical circuit and charge multiple EVs at once with Commander 2 integrated load management intelligence.

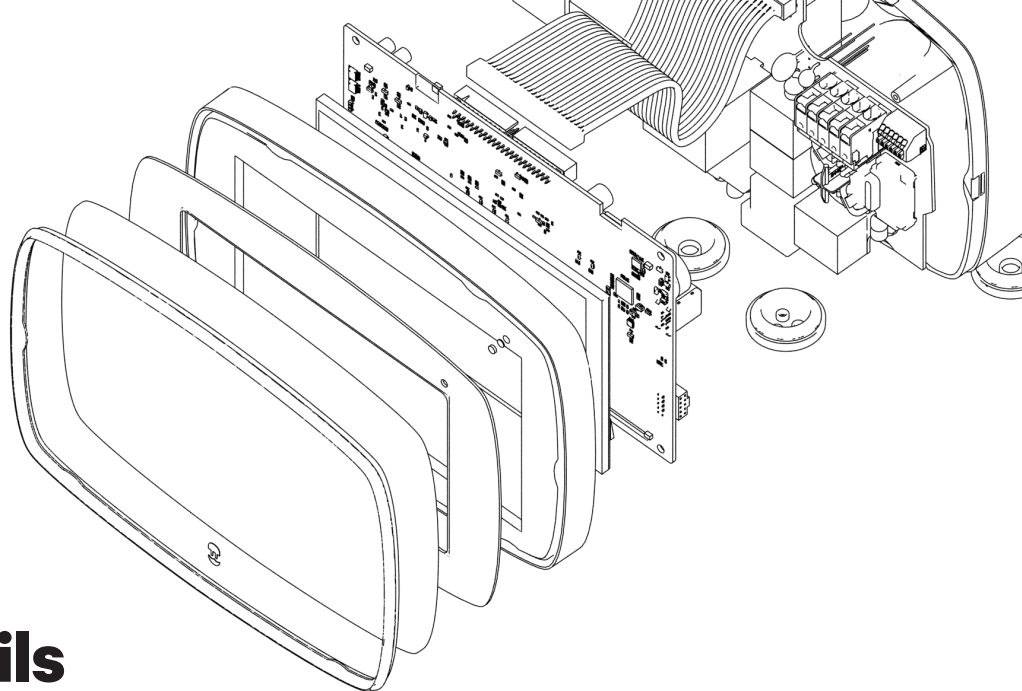

# Product Details

## GENERAL SPECIFICATIONS

<b>Colour:</b>	White or Black
<b>Charging mode</b>	Mode: 3
<b>Dimensions:</b>	221x152x115 mm (without cable)
<b>Weight:</b>	2,4kg (without cable)
<b>Cable length:</b>	5 m (7m optional)
<b>Earthing Protection:</b>	Built-In Earthing for the 7,4kW

## ELECTRICAL SPECIFICATIONS

<b>Maximum</b>	7,4 kW (1Phase) /
<b>Charging Power:</b>	22 kW (3Phase)
<b>Rated Voltage AC±10%:</b>	220 V to 240 V (7,4kW) / 400 V (11kW and 22kW)
<b>Rated Current:</b>	32 A (7,4 kW - 1Phase) / 16 A (11 kW - 3Phase) / 32 A (22 kW - 3Phase)
<b>Connector type:</b>	Type 1 or Type 2
<b>Cable Section:</b>	5x10mm <sup>2</sup>
<b>Configurable Current:</b>	from 6 A to rated current
<b>Protection Rating:</b>	IP54 / IK10
<b>Residual Current Detection:</b>	DC 6 mA

## CONNECTIVITY & USER INTERFACE

<b>Connectivity:</b>	Wi-Fi / Ethernet / Bluetooth / Optional: 3G-4G
<b>User Identification:</b>	PIN Code / RFID Card / myWallbox app
<b>User Interface:</b>	Touchscreen / myWallbox app & portal
<b>Charger Status</b>	Touchscreen / RGB LED / myWallbox app & porta
<b>Included Features:</b>	Power Sharing /
<b>Optional Features:</b>	Power Boost / Dynamic Power Sharing / MID Meter
<b>Communication Protocol:</b>	myWallbox / OCPP 1.6j